



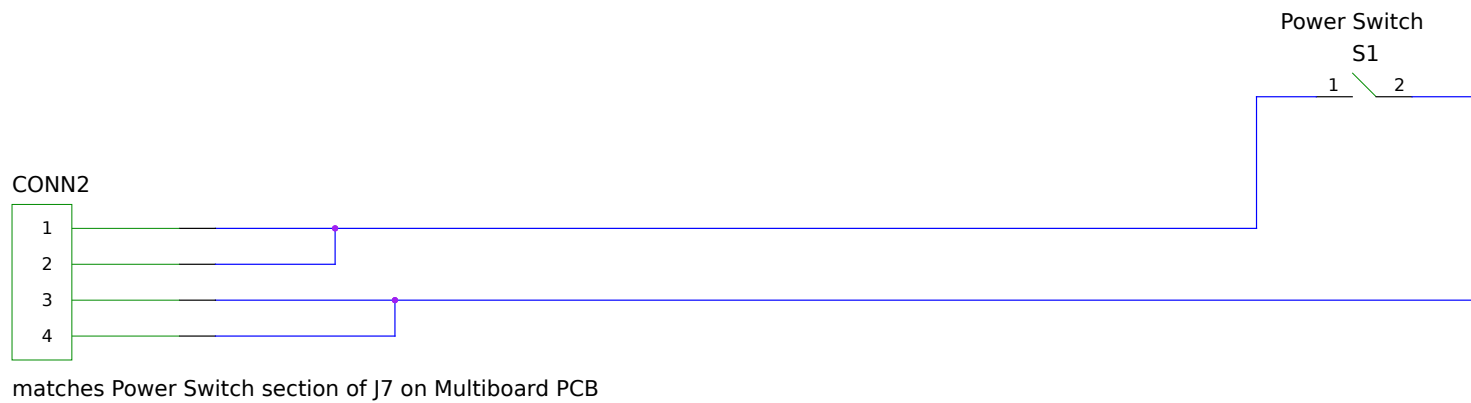


Power Switch		ZeroCAT Dev Kit	
TITLE		Put the fun back into hardware development! git://zerocat.org/zerocat/projects/zerocat-dev-kit.git	
FILE:	cables-page01.sch	REVISION:	2117b7b4b (master)
PAGE	OF	DRAWN BY:	

CONN4
USB Plug Type A



Host

CONN5
USB Plug Type A



PCB

CONN6



DC power jack plug 5.5mm, pin 2.1mm, matches CONN1 on Multiboard PCB

Power Cable Y-USB

Zerocat Dev Kit

Put the fun back into hardware development!
[git://zerocat.org/zerocat/projects/zerocat-dev-kit.git](https://zerocat.org/zerocat/projects/zerocat-dev-kit.git)


FILE: cables-page02.sch

REVISION: 2117b7b4b (master)

PAGE OF

DRAWN BY:

RS232 cable, about 100cm long

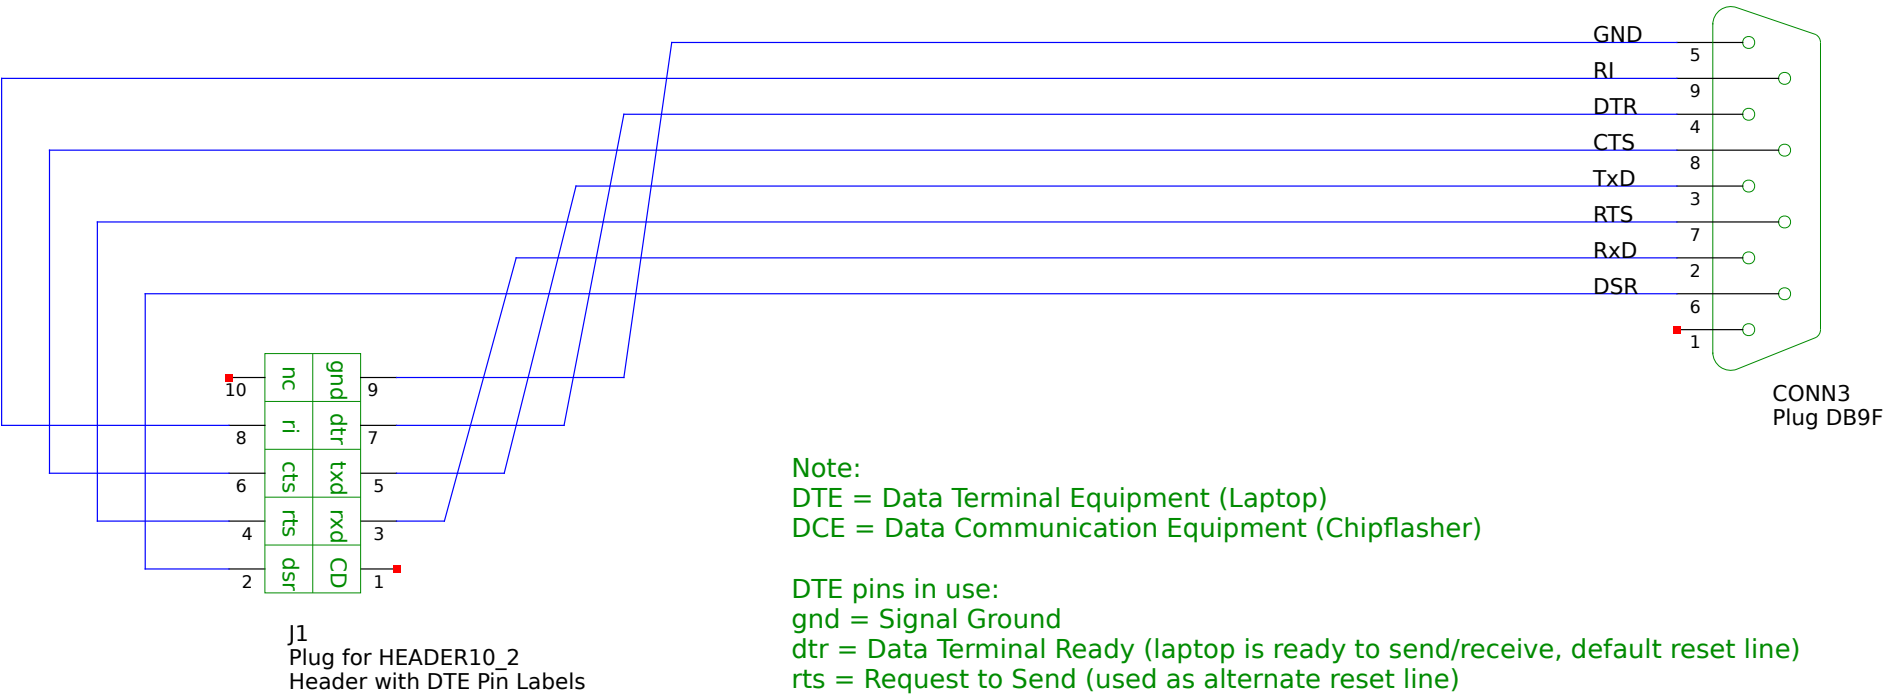

Note:
DTE = Data Terminal Equipment (Laptop)
DCE = Data Communication Equipment (Chipflasher)

DTE pins in use:
gnd = Signal Ground
dtr = Data Terminal Ready (laptop is ready to send/receive, default reset line)
rts = Request to Send (used as alternate reset line)
txd = Transmit Data
rx = Receive Data